

AUTOTEX STEEL

Product Data Sheet


Textured Hardcoated Polyester Film



PRODUCT DESCRIPTION

Autotex Steel is a high quality textured hardcoat polyester* film, for applications requiring a combination of high abrasion resistance and flexibility such as embossed membrane switches. **Autotex Steel** gives a stainless-steel look when printed with metallic ink and can also give an effective woodgrain appearance.

Autotex Steel is available in sheets and rolls. Note that in the roll format, the steel grain runs in the machine direction – that is, parallel to the length of the roll.

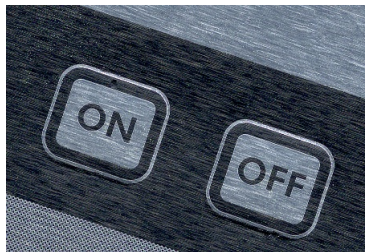

*The term polyester is the generic term for several different polymers, of which polyethylene terephthalate (PET) is the most common. PET is used in MacDermid Enthone Industrial Solutions polyester film products.

PRODUCT RANGE

Product	Finish	Gauge	
		150 µm	200 µm
Autotex Steel with 0-series ink primer for solvent based screen printing inks and UV cured digital	Steel	S150	S200
Autotex Steel with 3-series ink primer for UV cured inkjet, UV cured screen printing and solvent based screen printing inks	Steel	S153	S203
Autotex Steel with 7-series ink primer for UV cured screen printing inks and solvent based screen printing inks	Steel	S157	S207



TYPICAL PROPERTIES

Property	Typical Value	Test Method
Haze ¹	50% ± 5%	ASTM D1003
Total luminous transmission ¹	92% ± 2%	ASTM D1003
Gloss level (60°) ¹ with the grain (MD) against the grain (TD)	25 - 30 GU 8 - 10 GU	ASTM D2457 (Modified to test method 022)
Yellowness index ³	< 3	ASTM E313
Hardcoat adhesion ³	Pass	Test method 080
Switch life ¹	> 5 million actuations	Test method 003
Tensile strength at break ²	172 N / mm ²	ASTM D882
Breakdown voltage ² 150 μ 200 μ	16 - 18 kV 18 - 20 kV	ASTM D149
Dimensional stability ³	0.2% max. shrinkage MD at 120 °C	Test method 094
Thickness all grades ¹	Nominal ± 10%	Test method 096
Maximum processing temperature	120 °C	-
Maximum use temperature ¹	Low humidity (< 10% RH) 85 °C High humidity (10-95% RH) ≤ 60 °C	Test method 012
Minimum use temperature ¹	-40 °C (-40 °F)	Test method 012
Chemical resistance	Excellent resistance to many common industrial solvents and household chemicals - please see Autotex Solvent Resistance Data Sheet	

Note: All evaluation results are obtained from lab produced samples at MacDermid Enthone Industrial Solutions. They are for general guidance only and do not represent the final product's properties.

¹For details of test method, please contact MacDermid Enthone Industrial Solutions

²Data derived from base film manufacturer's literature. The coating slightly enhances most properties

³Specification value



PRIMER

Autotex Steel has an ink adhesion primer on the second surface. Two versions are available:

The standard 0-series ink-receptive coating for solvent based screen printing inks. This primer has also been used successfully with some digital UV inkjet printers. Please contact MacDermid Enthone Industrial Solutions for more information.

The 3-series primer is for use with UV curable inkjet inks, solvent based screen printing inks and UV screen printing inks.

The 7-series primer offers excellent adhesion to a wide range of solvent based screen printing inks and UV screen printing inks.

MIRROR INKS

We have found that some mirror screen printing inks can be more brittle than graphic inks and, for this reason, we recommend that customers perform their own printing trials and in-house evaluations. 0-series ink primer is particularly good for creating blemish free prints with mirror inks.

WINDOWS

Autotex Steel can be screen printed with Windotex windowing lacquers to obtain a clear window. The cosmetic quality of the printed window can be affected by the steel finish, i.e. where there are deep lines in the texture these may be seen in a printed window. Special printing guidelines are available in the Windotex Processing and Safety Recommendations.

SHELF LIFE & STORAGE CONDITIONS

The recommended shelf life is 36 months from date of manufacture. MacDermid Enthone Industrial Solutions guarantee a minimum remaining shelf life of 8 weeks at the time of despatch.

The recommended shelf life represents the maximum processing life time of the product from the date of manufacture when stored correctly and in unopened packaging.



The following storage conditions are recommended:

Storage Conditions	
Temperature	15 °C to 25 °C
Relative Humidity	50 to 65%
Packaging	Store in original protective packaging Once the packaging has been opened, the processing lifetime can be compromised due to air ingress, contamination or UV light
Moisture	Store away from water sources
Chemicals	Keep away from aggressive solvents

IMDS ID-No

By arrangement with our regulatory affairs team.



SAFETY & WARNING

MacDermid Enthone Industrial Solutions recommends that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use.

Safety Data Sheets are available from MacDermid Enthone Industrial Solutions.

WASTE TREATMENT

Prior to using any recommendations or suggestions by MacDermid Enthone Industrial Solutions for waste treatment, the user is required to know the appropriate local/state/federal regulations for on-site or off-site treatment which may require permits. If there is any conflict regarding our recommendations, local/state/federal regulations take precedent.

CONTACT INFORMATION

To confirm this is the most recent issue, please contact us:

IndustrialFilms@macdermidenthone.com

Americas 245 Freight Street Waterbury, CT 06702, USA (800) 323 0632	Europe & rest of the world Grove Road, Wantage, Oxon OX12 7BZ, UK +44 (0) 1235 771111	Asia 26 Tuas West Road Singapore 638382 +65 6862 3327
-------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------

Website: industrial.macdermidenthone.com

The information and recommendations in this publication are believed to be accurate and are offered in good faith. Suggestions concerning uses and applications are only the opinion of MacDermid Autotype Limited and/or its affiliates and related entities (referred to herein as "MacDermid") and users should carry out their own testing procedures to confirm suitability for their purposes. Except in case of death or personal injury caused by the materials, MacDermid MAKES NO WARRANTY OF ANY KIND AND EXCLUDES ANY STATUTORY WARRANTY EXPRESS OR IMPLIED other than that materials conform to their current applicable standard specifications. Statements herein therefore should not be construed as guarantees of satisfactory quality or fitness for purpose unless expressly prohibited by compulsory law provisions. The responsibility of MacDermid for claims arising out of breach of guarantee, negligence, strict liability or otherwise is limited to the purchase price of the material. Suggestions concerning working practices and procedures are based on the practices adopted by existing users of the products and are made in good faith. IT IS THE RESPONSIBILITY OF THE USER TO ENSURE THAT ALL RELEVANT HEALTH AND SAFETY LAWS AND REGULATIONS ARE COMPLIED WITH. MacDermid does not provide any advice on such laws and regulations and accepts no responsibility, express or implied, for breach of such regulations.

WARNING: Nothing in this guide or in these technical specifications should be construed to imply or suggest that the user employ operations or create articles, which would infringe any patents belonging to third parties. It is the customer's responsibility to ensure that its operations, the conditions of processing, and articles of manufacture do not infringe the foregoing patents, or any third-party patents. MacDermid does not accept responsibility for any infringement of intellectual property rights of third parties.